




Ultra Web

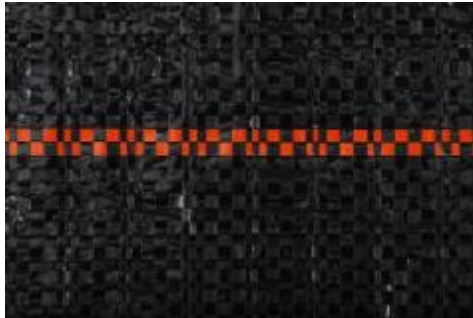

DeWitt UltraWeb is a woven polypropylene groundcover that provides years of reliable results. The fabric resists punctures, tears, and weed penetration. UltraWeb is formulated to resist uv degradation, and allows air, water, and nutrients to pass through the fabric.

Property	Test Method	Unit	Minimum Average Roll Value
Material			Polypropylene
Color			Black with Orange Stripe every 12"
Construction Weave			11.5 X 9 or 9 X 11.5
Weight	ASTM D 5261	(OZ/SY) GSM	(2.0) 70
Grab Tensile Strength	ASTM D 4632	LBS	Warp 80 Weft 70
Grab Elongation	ASTM D 4632	%	Warp 25 Weft 25
Trapezoid Tear	ASTM D 4533	LBS	Warp 55 Weft 45
Puncture	ASTM D 6241	LBS	325
Water Permeability	ASTM D 4491	GAL/MIN/SF	9
Ultraviolet Exposure	ASTM D 4355	% Strength Retained	50% after 3000 Hrs Xenon Arc Exposure

Date: 12/13/16. This data sheet supersedes all previously issued data.
The above properties are typical averages.

THIS INFORMATION RELATES ONLY TO THE SPECIFIC MATERIAL DESIGNATED AND MAY NOT BE VALID FOR SUCH MATERIAL USED IN COMBINATION WITH ANY OTHER MATERIALS OR IN ANY PROCESS, SUCH INFORMATION IS TO THE BEST OF OUR KNOWLEDGE AND BELIEF, ACCURATE AND RELIABLE AS THE DATE COMPLIED. HOWEVER NO REPRESENTATION, WARRANTY OR GUARANTEE IS MADE AS TO ITS ACCURACY, RELIABILITY OR COMPLETENESS. IT IS THE USER'S RESPONSIBILITY TO SATISFY HIMSELF AS TO THE SUITABILITY AND COMPLETENESS OF SUCH INFORMATION FOR HIS OWN PARTICULAR USE. WE DO NOT ACCEPT LIABILITY FOR ANY LOSS OR DAMAGE THAT MAY OCCUR FROM THE USE OF THIS INFORMATION NOR DO WE OFFER ANY WARRANTY AGAINST PATENT INFRINGEMENT.

905 South Kingshighway Sikeston, MO 63801

www.dewittcompany.com

573.472.0048 phone / 800.888.9669 / 573.471.6715 fax